97-10366

O.M.B. No. 3067-0077 Expires July 31, 1999

98-11209 FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a requirest for a Latter of Man Amandment or Pagainar (LOMA) and COMIN Visconsideration. the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form. Instructions for completing this form can be found on the following pages.

			, _ , _ , _ , _ , _ , _ , _ , _ , _ , _
	SECTION A PROPERTY INFORMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	P		POLICY NUMBER
829 NOTTH	Unit, Suite and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMB	ER	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block) LOT 14 AND THE	ck Numbers, etc.)	B, FIRST ADDITION	ON TO COLLEGE POINT
LYNN HAVE	SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION	32444
Provide the following from the	proper FIRM (See Instructions):		
1. COMMUNITY NUMBER	2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INC. OZAO D WHUAPT 3, 199	F 111-0"	6. SASE FLOOD ELEVATION (In AC Zones, use depth) EL = 8.00 FEET
3. For Zones A or V, where no	n system used on the FIRM for Base Flood Elevations BFE is provided on the FIRM, and the community ha	as established a BFE fo	
1 - 1 1 .	SECTION C BUILDING ELEVATION IN	FORMATION	
 (b). FIRM Zones V1-V30, VE the selected diagram, is (c). FIRM Zone A (without Bl below (check one) the (d). FIRM Zone AO. The floor one) the highest grade at level) elevated in accorded. Indicate the elevation dature under Comments on Page 1 	NGVD (or other FIRM datum—see Section B, Item 7). If, and V (with BFE). The bottom of the lowest horizon at an elevation of	er FIRM datum—see See elected diagram is feet at railable, is the building dinance? Yes vel elevations: X NGV the elevations is different feet at the elevations is a feet at the elevation is	ection B, Item 7). J. L feet above C or Dove Or below (check s lowest floor (reference No Unknown /D '29 Other (describe rent than that used on
	sed appears on FIRM: 🗌 Yes 🗵 No. (See Instruction	• .	
(NOTE: Use of construction	on is based on: A actual construction C construct in drawings is only valid if the building does not yet ha be valid for the building during the course of construc- uction is complete.)	ve the reference level .	
5. The elevation of the lowest Section B, Item 7).	grade immediately adjacent to the building is: 11	Ĺ∄.∏ feet NGVD (or other FIRM datum-see
	SECTION D COMMUNITY INFORM	MATION	
is not the "lowest floor" as o floor" as defined by the ordi	ponsible for verifying building elevations specifies that defined in the community's floodplain management or analysis: Land Land Land feet NGVD (or other FIRM stion or substantial improvement	dinance, the elevation o	of the building's "lowest
FEMA Form 81-31, MAR 97	REPLACES ALL PREVIOUS EDITIONS	SEE REV	ERSE SIDE FOR CONTINUATION

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

R. MARK NOTES, P.O. M.

CERTIFIER'S NAME


LICENSE NUMBER (or Affix Seal)

LICENSE NUMBER (or A

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: ELEVATION PREFERENCE: U.S.C. & G.S. BENCHMARK NO. X-ZO WITH AN EXISTING ELEVATION OF B.9Z FEET N.G.Y.D. OF 1920

THE PERFENCE LEVEL AS STATED HEREIN IS THE WOOD FRANTE FINISH
FLOOR FOR THE RESIDENCE. THE REGIDENCE HAS AN ATTACHED GARAGE
WITH A DETACTED CONCRETE FLOOR AT AN ELEVATION OF 7.57 FEET N.G.V.

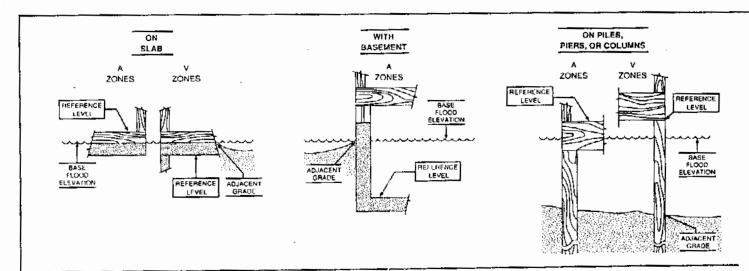

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.