U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					FOR INSUR	ANCE COMPANY USE
A1. Building Owner's Name Policy Number:						
Brown, Larry C & Debra A						
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 7700 CATTAIL MARSH LN Company NAIC Number:						
City			State		ZIP Code	
PANAMA CITY BEACH			Florida		32413	
A3. Property Description (Lo Parcel ID 32611-636-000	t and Block Numbers, Ta	ax Parcel	Number, Leg	gal Description, et	0.)	
A4. Building Use (e.g., Resi	lential, Non-Residential,	Addition,	Accessory, e	etc.) RESIDEN	TIAL	
A5. Latitude/Longitude: La	. N30d17'28.6"	Long. W	/85d48'42.7"	Horizonta	I Datum: 🔲 NAD 1	927 🗷 NAD 1983
A6. Attach at least 2 photog	aphs of the building if th	e Certific	ate is being u	sed to obtain floo	d insurance.	
A7. Building Diagram Numb	er <u>6</u>					
A8. For a building with a cra	vlspace or enclosure(s):					
a) Square footage of cr	awispace or enclosure(s)	i		589.00 sq ft		
b) Number of permanen	flood openings in the cr	awispace	e or enclosure	e(s) within 1.0 fool	above adjacent gra	de <u>5</u>
c) Total net area of floor	openings in A8.b		640.00 sq in			
d) Engineered flood ope	nings? ၨx Yes ☐ t	٥V				
A9. For a building with an att	ached garage:					
a) Square footage of attached garage0.00 sq ft						
b) Number of permaner	t flood openings in the at	tached g	arage within '	1.0 foot above adj	acent grade 0	
c) Total net area of floor	openings in A9.b		ps 00.0	in		
d) Engineered flood ope	nings? 🗌 Yes 🗷 ì	٧o				
	SECTION B - FLOOD	INSURA	1		ORMATION	
B1. NFIP Community Name & Community Number UNINCORPORATED BAY COUNTY 120004 B2. County Name B3. State BAY Florida						
B4. Map/Panel Number B5. Suffix B6. FIRM Index Date B7. FIRM Panel Effective/ Zone(s) B9. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)						
12005C0195 H 06-02-2009 Revised Date 06-02-2009 AE 9.0						
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:						
FIS Profile X FIRM Community Determined Other/Source:						
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:						
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No						
Designation Date: CBRS OPA						
						W-11.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, and/or 7700 CATTAIL MARSH LN	Policy Number:				
City Stat PANAMA CITY BEACH Flor		Code 13	Company NAIC Number		
SECTION C – BUILDING ELE	EVATION INFORMA	TION (SURVEY R	EQUIRED)		
 C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. 					
Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: L 176 Vertical Datum: NAVD88					
Indicate elevation datum used for the elevations in ite ☐ NGVD 1929 🗷 NAVD 1988 ☐ Other/S		w.			
Datum used for building elevations must be the same	e as that used for the B	BFE.	Check the measurement used.		
a) Top of bottom floor (including basement, crawlsp	ace, or enclosure floor)	6.5 x feet meters		
b) Top of the next higher floor			17.6 x feet meters		
c) Bottom of the lowest horizontal structural membe	r (V Zones only)		N/A x feet meters		
d) Attached garage (top of slab)			N/A ✓ feet ✓ meters		
 e) Lowest elevation of machinery or equipment serv (Describe type of equipment and location in Com 	ricing the building ments)	a	10.0 x feet meters		
f) Lowest adjacent (finished) grade next to building	(LAG)	:	4.8 x feet meters		
g) Highest adjacent (finished) grade next to building	(HAG)	-	5.9 x feet meters		
 h) Lowest adjacent grade at lowest elevation of dec structural support 	k or stairs, including	1	N/A 🗷 feet 🗌 meters		
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION					
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.					
Were latitude and longitude in Section A provided by a licensed land surveyor?					
Certifier's Name LYMAN DOUGLAS LEMACKS	License Number LS#6287		The same		
Title PROFESSINAL SURVEYOR AND MAPPER			TANGET OF TORREST		
Company Name MTS SURVEYING & MAPPING			Figgs - W. M. D. Carrier		
Address 4619 ASHLAND WAY					
City PANAMA CITY	State Florida	ZIP Code 32404			
Signature LYMAN DOUGLAS LEMACKS Digitally signed by LYMAN DOUGLAS LEMACKS Date: 2021.10.26 15:17:21 -0500	Date 10-25-2021	Telephone (850) 704-5775	Ext.		
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.					
Comments (including type of equipment and location, per C2(e), if applicable) AIR CONDITIONING IS ON A PAD OUTSIDE 5 VENTS, CRAWL SPACE DORR SYSTEMS MODEL #CRBA816					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

			Expiration Batol (1010)	701 00, 2022		
IMPORTANT: In these spaces, copy the corresp	onding information	from Section A.	FOR INSURANCE COM	IPANY USE		
Building Street Address (including Apt., Unit, Suite, 7700 CATTAIL MARSH LN	and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:			
City	State	ZIP Code	Company NAIC Number	r		
PANAMA CITY BEACH	Florida	32413				
SECTION E ~ BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B,and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.						
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement,						
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet	ers above or belo	ow the HAG.		
crawlspace, or enclosure) is		feet mete	ers above or belo	w the LAG.		
E2. For Building Diagrams 6–9 with permanent flo the next higher floor (elevation C2.b in the diagrams) of the building is	od openings provided	I in Section A Items 8 and/o				
E3. Attached garage (top of slab) is	<u> </u>	feet mete	ers above or belo	w the HAG.		
E4. Top of platform of machinery and/or equipmer servicing the building is	nt	feet mete	ers	w the HAG.		
E5. Zone AO only: If no flood depth number is ava floodplain management ordinance? Yes	illable, is the top of th	e bottom floor elevated in a own. The local official mus	ccordance with the commu t certify this information in	unity's Section G.		
SECTION F - PROPERTY	OWNER (OR OWNE	R'S REPRESENTATIVE) C	ERTIFICATION			
The property owner or owner's authorized represer community-issued BFE) or Zone AO must sign her	e. The statements in	s Sections A, B, and E for Z Sections A, B, and E are co	one A (without a FEMA-isorrect to the best of my kno	sued or owledge.		
Property Owner or Owner's Authorized Representa	ative's Name					
Address		City S	State ZIP	Code		
Signature		Date T	elephone			
Comments						
			-			
_			Check here if a	ttachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	FOR INSURANCE COMPANY USE						
7700 CATTAIL MARSH LN				Policy Number:			
City PANAMA CITY BEACH	State Florida	ZIP Code 32413		Company NAIC Number			
SECTIO	N G – COMMUNIT	Y INFORMATION (OPTIO	NAL)				
The local official who is authorized by law or ord Sections A, B, C (or E), and G of this Elevation	The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.						
G1. The information in Section C was take engineer, or architect who is authorized data in the Comments area below.)							
G2. A community official completed Section or Zone AO.	on E for a building l	ocated in Zone A (without a	a FEMA	\-issued or community-issued BFE)			
G3. The following information (Items G4–	G10) is provided for	r community floodplain mar	nageme	ent purposes.			
G4. Permit Number	G5. Date Permit I	ssued		Date Certificate of Compliance/Occupancy Issued			
PP 20-00388	2/10/2021						
G7. This permit has been issued for:	New Construction	Substantial Improvement	ent				
G8. Elevation of as-built lowest floor (including of the building:	basement)	[feet	meters Datum			
G9. BFE or (in Zone AO) depth of flooding at t	he building site: _	[feet	meters Datum			
G10. Community's design flood elevation:	-		feet	meters Datum			
Local Official's Name		Title					
Community Name		Telephone					
Signature Date ////Zoz/ Comments (including type of equipment and location, per C2(e), if applicable)							
ok forco							
				Check here if attachments.			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., 7700 CATTAIL MARSH LN	Policy Number:		
City	State	ZIP Code	Company NAIC Number
PANAMA CITY BEACH	Florida	32413	ж =

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

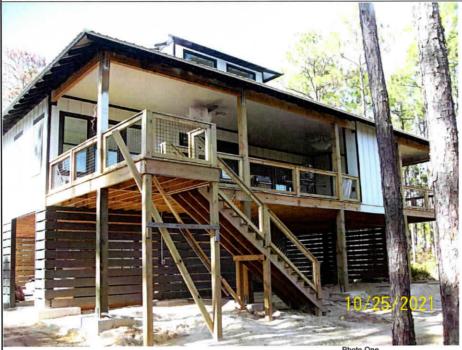


Photo One

Photo One Caption front view Clear Photo One



rear view Photo Two Caption

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy th	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 7700 CATTAIL MARSH LN			Policy Number:
City PANAMA CITY BEACH	State Florida	ZIP Code 32413	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption side view

Clear Photo Three



Photo Four Caption AIRCONDITIONING UNIT

Clear Photo Four



ICC-ES Evaluation Report

ESR-3851

Reissued September 2020 Revised January 2021

This report is subject to renewal September 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

CRAWL SPACE DOOR SYSTEMS, INC.

EVALUATION SUBJECT:

CRAWL SPACE DOOR SYSTEMS FLOOD VENT MODEL #CSBA816 CRAWL SPACE STACKED MODELS: #ICCSTACKED2; #ICCSTACKED4 FLOOD VENT INSULATED KIT #ICCINSULATED

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018 and 2015 International Building Code®
- 2018 and 2015 International Residential Code®

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Crawl Space Door Systems flood vents are used to provide for the equalization of hydrostatic flood forces on exterior

3.0 DESCRIPTIONS

3.1 General:

Crawl Space Door Systems flood vents are engineered mechanically operated flood vents. Upon contact with flood water, the flood vents automatically open and allow flood water to enter and exit enclosed areas. The vents are constructed of general purpose ABS SP-9010 plastic. The Crawl Space Flood Vent Model #CSBA816 has a faux louver with either a solid plastic plate or wire mesh attached to the back of the louver. The louver is dislodged from the vent upon contact with flood waters. See Figure 1 for an illustration of the flood vent Model #CSBA816.

The Flood Vent Insulated Kit Model #ICCINSULATED is constructed of general purpose ABS SP-9010 plastic. The vent frame opening is filled with a 2-inch thick (51 mm) extruded polystyrene Styrofoam™ Brand Scoreboard Foam Insulation Board (ESR-2142). The insulation board is dislodged from the vent upon contact with flood waters,

allowing flood waters to enter and exit enclosed areas. See Figure 2 for an illustration of the Flood Vent Insulated Kit Model #ICCINSULATED.

The Crawl Space Stacked Model #ICCSTACKED2 contains two vertically arranged Crawl Space Flood Vents (Model #CSBA816) in one assembly. The Crawl Space Stacked Model #ICCSTACKED4 contains four Crawl Space Flood Vents (Model #CSBA816) in one assembly, with two sets of side by side flood vents vertically arranged.

3.2 Engineered Opening:

The Crawl Space Door Systems static flood vents comply with the design principle noted in Section 2.7.2.2 of ASCE/SEI 24 for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24-14, the flood vents must be installed in accordance with Section 4.0 of this report.

3.3 Ventilation:

The Crawl Space Flood Vent Model #CSBA816 and Crawl Space Stacked Models #ICCSTACKED2 #ICCSTACKED4 are available covered with metal wire mesh with 0.108 inch by 0.108 inch (2.74 mm by 2.74 mm) openings. The mesh is covered by a faux louver with 11/16 inch (17.5 mm) vertical clearance between each blade. The Crawl Space Flood Vent Model #CSBA816 provides 11 square inches (7097 mm²) of net free area to supply natural ventilation when equipped with wire mesh. The Crawl Space Stacked Models #ICCSTACKED2 and #ICCSTACKED4 supply 22 square inches (14,194 mm²) and 44 square inches (28,388 mm²), respectively, of net free area to supply natural ventilation when equipped with wire mesh. The Crawl Space Flood Vent Model #CSBA816 covered with a solid plastic plate, Crawl Space Stacked Models #ICCSTACKED2 and #ICCSTACKED4 covered with a solid plastic plate, and the Flood Vent Insulated Kit Model #ICCINSULATED do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

The Crawl Space Door Systems flood vents are designed to be installed into walls or doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14, the vent must be installed as follows:

■ With a minimum of two openings; one on different sides of each enclosed area.





- With a minimum of one vent for the square footage of enclosed area noted in Table 1.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Crawl Space Door Systems flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Crawl Space Door Systems flood vents must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Crawl Space Door Systems flood vents must not be used in the place of "breakaway walls" in coastal high hazard areas but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 The Crawl Space Door Systems flood vents are manufactured under a quality control system with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (Editorially revised October 2017).

7.0 IDENTIFICATION

- 7.1 The Crawl Space Door Systems flood vents recognized in this report must be identified by a label bearing the manufacturer's name (Crawl Space Door Systems), the model number, and the evaluation report number (ESR-3851).
- 7.2 The report holder's contact information is the following:

CRAWL SPACE DOOR SYSTEMS, INC. 3669 SEA GULL BLUFF DRIVE VIRGINIA BEACH, VIRGINIA 23455 (757) 363-0005

www.crawlspacedoors.com

TABLE 1—CRAWI	SPACE DOOR	SYSTEMS F	LOOD VENTS
---------------	------------	-----------	------------

MODEL	OVERALL VENT SIZE (Width x Height x Depth) (in)	ROUGH OPENING SIZE (Width x Height) (in)	ENCLOSED AREA COVERAGE (ft²)
CSBA816	18 ¹ / ₄ x 10 ¹ / ₂ x 1 ³ / ₄	16 x 8 ¹ / ₄	305
ICCINSULATED	18 ¹ / ₄ x 10 ¹ / ₂ x 1 ³ / ₄	15 ³ / ₄ x 8	300
ICCSTACKED2	30 x 30 x 2 ³ / ₄	24 x 24	610
ICCSTACKED4	40 ¹ / ₂ × 24 ³ / ₄ × 2 ³ / ₄	35 ¹ / ₄ x 19 ¹ / ₂	1,220

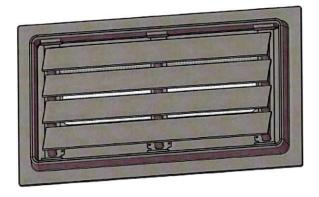


FIGURE 1—CRAWL SPACE DOOR SYSTEMS FLOOD VENT




FIGURE 2—FLOOD VENT INSULATED KIT



ICC-ES Evaluation Report

ESR-3851 CBC and CRC Supplement

Issued September 2020 Revised December 2020

This report is subject to renewal September 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

CRAWL SPACE DOOR SYSTEMS, INC.

EVALUATION SUBJECT:

CRAWL SPACE DOOR SYSTEMS FLOOD VENT #CSBA816 CRAWL SPACE STACKED MODELS #ICCSTACKED2; #ICCSTACKED4 FLOOD VENT INSULATED KIT #ICCINSULATED

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Crawl Space Door Systems flood vents, described in ICC-ES evaluation report ESR-3851, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Crawl Space Door Systems flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3851, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Crawl Space Door Systems flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3851, comply with 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued September 2020 and revised January 2021.





ICC-ES Evaluation Report

ESR-3851 FBC and FRC Supplement

Reissued September 2020 Revised January 2021 This report is subject to renewal September 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

CRAWL SPACE DOOR SYSTEMS, INC.

EVALUATION SUBJECT:

CRAWL SPACE DOOR SYSTEMS FLOOD VENT #CSBA816 CRAWL SPACE STACKED MODELS #ICCSTACKED2; #ICCSTACKED4 FLOOD VENT INSULATED KIT #ICCINSULATED

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Crawl Space Door Systems flood vents, described in ICC-ES evaluation report ESR-3851, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Crawl Space Door Systems flood vents, described in Sections 2.0 through 7.0 of ICC-ES evaluation report ESR-3851, comply with the Florida Building Code—Building and Florida Building Code—Residential, provided the design requirements are determined in accordance with the Florida Building Code—Building and Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-3851 for the 2018 International Building Code® meet the requirements of the he Florida Building Code—Building and Florida Building Code—Residential, as applicable.

Use of the Crawl Space Door Systems flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the 2020 Florida Building Code—Building and Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2020 and revised January 2021.

