U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Hand, Tracy Paul	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 6820 SUNRISE DR	Company NAIC Number:
City: PANAMA CITY BEACH State: FL	ZIP Code: 32407
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel NumParcel ID 27344-084-000	nber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): RESIDENTIAL	
A5. Latitude/Longitude: Lat. 30°12'3.67"N Long. 85°45'27.99"W Horiz. Datum:	NAD 1927 🗷 NAD 1983 🔲 WGS 84
A6. Attach at least two and when possible four clear color photographs (one for each side) of the bu	uilding (see Form pages 7 and 8).
A7. Building Diagram Number: 7	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): 1492 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	X Yes No N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings:0 Engineered flood openings:6	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: 0 sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instruction	ons): 1500 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 0 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Y Yes No No N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adja Non-engineered flood openings:0 Engineered flood openings:0	cent grade:
d) Total net open area of πon-engineered flood openings in A9.c: 0 sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instruction	ons):0 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): 0 sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	MATION
B1.a. NFIP Community Name: BAY COUNTY B1.b. NFIP Comm	munity Identification Number: 120004
B2. County Name: BAY B3. State: FL B4. Map/Panel No.: 1	
B6. FIRM Index Date: 06/02/2009 B7. FIRM Panel Effective/Revised Date: 06/02/200	
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Jase Flood Depth): 7.0
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: FIS FIRM Community Determined Other:	
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 🗷 NAVD 1988 ☐ Other/S	Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prote Designation Date:	ected Area (OPA)? Yes 🗷 No
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes	No

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box	No.:	FOR	INS	JRAN	CEC	COMPANY US
B20 SUNRISE DR ity: PANAMA CITY BEACH State: FL ZIP Code: 32407						
City: PANAMA CITY BEACH State: FL ZIP Code: 32407	······	Company NAIC Number:				
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)						
C1. Building elevations are based on: Construction Drawings* Building Unde A new Elevation Certificate will be required when construction of the building is com	r Constructi	on* 🗷] Fir	nished	l Con	struction
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), A99. Complete Items C2.a–h below according to the Building Diagram specified in It Benchmark Utilized: NETWORK Vertical Datum: NAV	tem A7. In P	NR/AE, uerto f	AR// Rico (Α1–Α3 only, ε	30, Ai enter	R/AH, AR/AO, meters.
Indicate elevation datum used for the elevations in items a) through h) below.		·		•		
Datum used for building elevations must be the same as that used for the BFE. Conversion If Yes, describe the source of the conversion factor in the Section D Comments area.	on factor use	ed?	_	Yes	×	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	;	5.35	Che	eck the feet	e me: □	asurement use meters
b) Top of the next higher floor (see instructions):	1	6.69	×	feet		meters
c) Bottom of the lowest horizontal structural member (see instructions):		N/A	×	feet		meters
d) Attached garage (top of slab):		N/A	×	feet		meters
 e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area): 	-	9.35	×	feet	П	meters
f) Lowest Adjacent Grade (LAG) next to building: Natural Finished		4.55	_ _	feet		meters
g) Highest Adjacent Grade (HAG) next to building: Natural 🗷 Finished	-	4.96	×	feet		meters
 Finished LAG at lowest elevation of attached deck or stairs, including structural support: 		N/A	×	feet		meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITEC	CT CERTIF	ICAT	ION			. .
This certification is to be signed and sealed by a land surveyor, engineer, or architect auth information. I certify that the information on this Certificate represents my best efforts to infalse statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 2	terpret the o	ate lav lata av	v to c	ertify le. I u	eleva nder.	ation stand that any
Were latitude and longitude in Section A provided by a licensed land surveyor?	∏No					
Check here if attachments and describe in the Comments area.	_					
Certifier's Name: JON ROBERT CHANCEY License Number: 7055				,,,,,,,,,	THIT!	44,
Title: PROFESSIONAL SURVEYOR AND MAPPER						
Company Name: MTS SURVEYING AND MAPPING						
Address: 4619 ASHI AND WAY						
City: PANAMA CITY State: FL ZIP Code: 32404 Telephone: (850) 704-5775 Ext.: Email: mtssurveyingmapping@gmail.com Signature: JON R. CHANCY Digitally signed by JON R. CHANCY Page: 2024 10 21 09:12:45-05700 Page: 2024 10						
Telephone: (850) 704-5775 Ext.: Email: mtssurveyingmapping@gm	ail.com		A STON	A A STATE OF THE PARTY OF THE P	757 F F F F F F F F F F F F F F F F F F	* THE
Signature: JON R. CHANCY Digitally signed by JON R. CHANCY Date: 2024.10.21 09:12:45 -05'00' Date: 10/15/	2024	-	"All	** sur //////// Place	_{увуок} 1011 ¹⁵ Sea	nn ^{n.} Here
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) in	nsurance age	nt/com	npany	, and	(3) b	uilding owner.
Comments (including source of conversion factor in C2; type of equipment and location per THE ELECTRIC PANEL IS MONUTED ON THE SIDE OF THE HOUSE VENTS ARE FREEDOM FLOOD VENTS MODEL # FFV-1608						

Building Street Address (including Apt., Unit, Su	ite, and/or Bldg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
6820 SUNRISE DR			Policy Number:
City: PANAMA CITY BEACH	State: FL	ZIP Code: <u>32407</u>	Company NAIC Number:
SECTION É - BUILDIN FOR ZONE	G MEASUREMEN AO, ZONE AR/A	NT INFORMATION (SUR)	VEY NOT REQUIRED) OUT BFE)
For Zones AO, AR/AO, and A (without BFE), of intended to support a Letter of Map Change reenter meters.	complete Items E1-E equest, complete Se	5. For Items E1–E4, use nactions A, B, and C. Check the	tural grade, if available. If the Certificate is e measurement used. In Puerto Rico only,
Building measurements are based on: Co *A new Elevation Certificate will be required with	onstruction Drawings hen construction of I	s*	truction* Finished Construction
E1. Provide measurements (C.2.a in applicab measurement is above or below the natur	le Building Diagram) al HAG and the LAG	for the following and check	the appropriate boxes to show whether the
 a) Top of bottom floor (including basemer crawlspace, or enclosure) is: 			eters
 b) Top of bottom floor (including basemer crawlspace, or enclosure) is: 			eters
E2. For Building Diagrams 6–9 with permaner next higher floor (C2.b in applicable	nt flood openings pro	vided in Section A Items 8 a	and/or 9 (see pages 1-2 of Instructions), the
Building Diagram) of the building is:		feet [] me	eters above or below the HAG.
E3. Attached garage (top of slab) is:		feet me	eters above or below the HAG.
E4. Top of platform of machinery and/or equip servicing the building is:	ment	feet me	eters above or below the HAG.
E5. Zone AO only: If no flood depth number is floodplain management ordinance?	available, is the top Yes ☐ No ☐ t		in accordance with the community's all must certify this information in Section G.
SECTION F - PROPERTY OWN	ER (OR OWNER'S	S AUTHORIZED REPRES	SENTATIVE) CERTIFICATION
The property owner or owner's authorized represign here. The statements in Sections A, B, and	esentative who com	pletes Sections A, B, and E t	for Zone A (without BFE) or Zone AO must
Check here if attachments and describe in			
Property Owner or Owner's Authorized Repres	entative Name:		
Address:	, <u></u>		
City:		State:	ZIP Code:
Telephone: Ext.:	Email:		
Signature:		Date:	
Comments:			

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
6820 SUNRISE DR City: PANAMA CITY BEACH State: FL ZIP Code: 32407	Policy Number:
City: PANAMA CITY BEACH State: FL ZIP Code: 32407	Company NAIC Number:
SECTION G – COMMUNITY INFORMATION (RECOMMENDED FOR COMMUNITY	TY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's floodplain ma Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and sign be	anagement ordinance can complete
G1. The information in Section C was taken from other documentation that has been signed	
engineer, or architect who is authorized by state law to certify elevation information. (Indelevation data in the Comments area below.)	ficate the source and date of the
G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zon E5 is completed for a building located in Zone AO.	ne AO, or Zone AR/AO, or when item
G2.b. A local official completed Section H for insurance purposes.	
G3.	e information in Sections A, B, E and H.
G4. The following information (Items G5–G11) is provided for community floodplain manager	
G5. Permit Number: PRS C 2023002000 Date Permit Issued: 1-3-24	1_
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: New Construction Substantial Improvement	
G9.a. Elevation of as-built lowest floor (including basement) of the	
building: feet [meters Datum:
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	meters Datum:
	meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	meters Datum
G11. Variance issued? Yes No If yes, attach documentation and describe in the Com	meters Datum:
The local official who provides information in Section G must sign here. I have completed the information correct to the best of my knowledge. If applicable, I have also provided specific corrections in the Co	ation in Section G and certify that it is mments area of this section.
Local Official's Name: Name: Stands Title: Plans	
NFIP Community Name: 3 Care	
Telephone: Ext.: Email:	
Address:	
City: State:	ZIP Code:
Signature: Date: 11-05	- 24
Comments (including type of equipment and location, per C2.e; description of any attachments; and of Sections A, B, D, E, or H):	corrections to specific information in
Sections A, B, D, E, or H).	
OL A (D. HMS	

Building Street Address (including / 6820 SUNRISE DR	Apt., Unit, Suite, and/or E	ldg. No.) o	r P.O. Route and	Box No.:	FOR IN	ISURANCE COMPANY USE
City: PANAMA CITY BEACH	State:	FL	ZIP Code: 324	107	- Policy N	lumber:
					_	y NAIC Number:
SEČTION H	I – BUILDING'S FIRS JRVEY NOT REQUIF	T FLOOF RED) (FO	R HEIGHT INFO R INSURANCE	ORMATION PURPOSE	FOR ALL S ONLY)	ZONES
The property owner, owner's authout to determine the building's first floor nearest tenth of a foot (nearest tenth of a foot (nearest tenth of a ppropriate instructions) and the appropriate	or height for insurance p oth of a meter in Puerto	ourposes, 8 Rico), <i>Ref</i>	Sections A, B, an ference the Four	id I must also Indation Type	be complete	ed. Enter heights to the
H1. Provide the height of the top	of the floor (as indicated	in Founda	ation Type Diagra	ams) above th	ne Lowest A	djacent Grade (LAG):
a) For Building Diagrams 1. floor (include above-grade floo crawlspaces or enclosure floo	ors only for buildings wil	of bottom th		_	meters	above the LAG
b) For Building Diagrams 2. higher floor (i.e., the floor abo enclosure floor) is:	A, 2B, 4, and 6–9. Top ve basement, crawlspace	of next ce, or		_	meters	above the LAG
H2. Is all Machinery and Equipme H2 arrow (shown in the Found ☐ Yes ☐ No	nt servicing the building lation Type Diagrams a	ı (as listed end of Se	in Item H2 instru ection H instruction	ictions) eleva ons) for the ap	ted to or abo opropriate B	ove the floor indicated by the uilding Diagram?
SECTION I - PROPE	RTY OWNER (OR O	NNER'S	AUTHORIZED	REPRESE	VTATIVE)	CERTIFICATION
The property owner or owner's aut A, B, and H are correct to the best indicate in Item G2.b and sign Sec	horized representative volume of my knowledge. Note	vho comple	etes Sections A.	B. and H mus	st sign here	The statements in Sections
Check here if attachments are	provided (including requ	ired photo	s) and describe e	each attachm	ent in the C	omments area
Property Owner or Owner's Author			•			
Address:						
City:				State:	ZIP	Code:
Telephone:	Ext.: Email	:				
Signature:			Date:			
Comments:						

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, 6820 SUNRISE DR	Suite, and/or Blo	dg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: PANAMA CITY BEACH	State:	FL	ZIP Code: <u>32407</u>	Policy Number: Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT VIEW

Clear Photo One

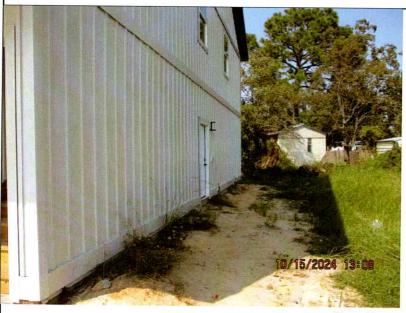


Photo Two

Photo Two Caption: SIDE VIEW

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

av Niveshaw
cy Number:
npany NAIC Number:

vents, as indicated in Sections A8 and A9.

Photo Three

Photo Three Caption: REAR VIEW

Clear Photo Three

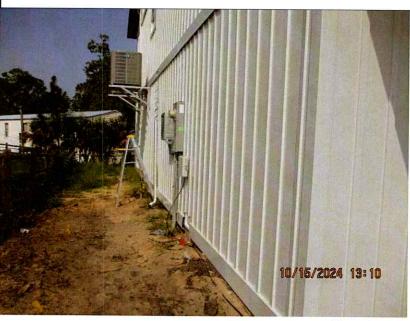


Photo Four

Photo Four Caption: ELECTRIC PANEL

Clear Photo Four



ICC-ES Evaluation Report

ESR-4332

Reissued March 2024

This report also contains:

Revised June 2024

- CBC Supplement

Subject to renewal March 2026

- FBC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00— OPENINGS

Section: 08 95 43— Vents / Foundation Flood Vents REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608



1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV–1608 Freedom Flood Vent® is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent® is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent® door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent® FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent® is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom

Flood Vent® must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m2) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE:

The Freedom Flood Vent® described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- **5.1** The model FFV-1608 Freedom Flood Vent® unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- **5.2** The model FFV-1608 Freedom Flood Vent® unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.
- **5.4** FFV–1608 Freedom Flood Vent[®] is manufactured in Gastonia, North Carolina under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2024).

7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-4332) along with the name, registered trademark, or registered logo of the report holder must be included in the product label.
- 7.2 In addition, the Freedom Flood Vent® model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- 7.3 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (800) 507-1527 www.freedomfloodvent.com info@freedomfloodvent.com

TABLE 1—FREEDOM FLOOD VENT®

MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE ¹ (ft ²)
Freedom Flood Vent®	FFV-1608	15 ³ / ₄ " × 8 ¹ / ₁₆ "	250

For SI: 1 inch = 25.4 mm

¹The enclosed coverage area in square feet is equivalent to the performance of the same number of square inches of non-engineered openings.

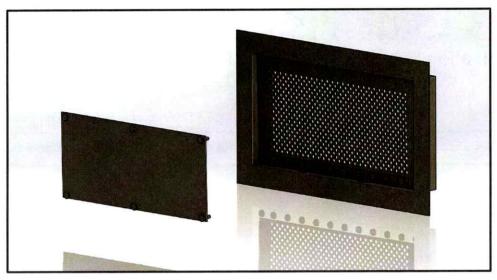


FIGURE 1-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH COVER REMOVED



FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code editions:

2022 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2022 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2021 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the CRC, provided the design and installation are in accordance with the 2021 *International Residential Code®* (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.





ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent® Automatic Foundation Flood Vent; Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2023 Florida Building Code—Building
- 2023 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements must be determined in accordance with the Florida Building Code—Building and the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2021 International Building Code® (IBC) meet the requirements of Florida Building Code—Building and the Florida Building Code—Residential, as applicable.

Use of the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.

