U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE				
A1. Building Owner's Name: DAVID MORGAN FOR JOHN & BRIANA SULLIVAN	Policy Number:				
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 6503 GOLDEN ASTER TRAIL	Company NAIC Number:				
City: PANAMA CITY BEACH State: FL	ZIP Code: 32413				
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nur LOT 154 RIVERCAMPS ON CROOKED CREEK UNIT 2 TAX ID (32611-657-000)	nber:				
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): RESIDENTIAL					
A5. Latitude/Longitude: Lat. 30°17′30.04" N. Long. 85°49′02.76" W. Horizontal Datum: N	IAD 1927 ⊠NAD 1983 □ WGS 84				
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	g (see Form pages 7 and 8).				
A7. Building Diagram Number:6					
A8. For a building with a crawlspace or enclosure(s):					
a) Square footage of crawlspace or enclosure(s): 1,792.00 sq. ft.					
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	⊠ Yes □ No □ N/A				
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings: 0 Engineered flood openings: 8	-				
d) Total net open area of non-engineered flood openings in A8.c:1,018.00 sq. in.					
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instruction	ons): 2,000.00 sq. ft.				
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions):N/A sq. ft.					
A9. For a building with an attached garage:					
a) Square footage of attached garage: 0.00 sq. ft.					
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Yes No No N/A				
 c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent of the control of the control	acent grade:				
d) Total net open area of non-engineered flood openings in A9.c: 0.00 sq. in.					
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons): o.00 sq. ft.				
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.					
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION				
B1.a. NFIP Community Name: BAY COUNTY B1.b. NFIP Community Ide	ntification Number: 120004				
B2. County Name: BAY B3. State: FL B4. Map/Panel No.:	12005C0190 B5, Suffix: J				
B6. FIRM Index Date: 10/24/2024 B7. FIRM Panel Effective/Revised Date: 10/24/20	24				
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Base Flood Depth): 12.0				
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other:					
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other/Source:					
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)?					
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No				

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Rou	te and Box No.:	FOR INSUR	ANCE C	OMPANY USE		
6503 GOLDEN ASTER TRAIL Policy Number:						
City: PANAMA CITY BEACH State: FL ZIP Code: 32413 Company NAIC Number:				ber:		
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)						
	C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.					
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (A99. Complete Items C2.a–h below according to the Building Diagram sp. Benchmark Utilized: Q 773 2017 Vertical D.						
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:						
Datum used for building elevations must be the same as that used for the BFE If Yes, describe the source of the conversion factor in the Section D Comment				No asurement used:		
 a) Top of bottom floor (including basement, crawlspace, or enclosure floor) 	r):	5.70 🛭 fe	et 🗌	meters		
b) Top of the next higher floor (see Instructions):	1	6.20 X fe	et 🗌	meters		
c) Bottom of the lowest horizontal structural member (see Instructions):		I/A fe	et 🗌	meters		
d) Attached garage (top of slab):		N/A fe	et 🗌	meters		
 e) Lowest elevation of Machinery and Equipment (M&E) servicing the buildescribe type of M&E and location in Section D Comments area): 		1.20 🛭 fe	et 🔲	meters		
f) Lowest Adjacent Grade (LAG) next to building: Natural Finis	hed	4.80 🛭 fe	et 🗌	meters		
g) Highest Adjacent Grade (HAG) next to building: Natural Finis	hed	5.60 X fe	et 🗌	meters		
 Finished LAG at lowest elevation of attached deck or stairs, including support: 		5.60 🛭 fe	et 🗌	meters		
SECTION D – SURVEYOR, ENGINEER, OR	ARCHITECT CERTIF	ICATION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by state law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.						
Were latitude and longitude in Section A provided by a licensed land surveyor?						
Check here if attachments and describe in the Comments area.						
Certifier's Name: ZANNIE THOMAS WHITE JR License Number: 6041						
Title: PRESIDENT						
Company Name: Z'S LAND SURVEYING & MAPPING, INC						
Certifier's Name: ZANNIE THOMAS WHITE JR License Number: 6041 Title: PRESIDENT Company Name: Z'S LAND SURVEYING & MAPPING, INC Address: PO BOX 401/1142 PERA ROAD **TITE OF THE COMMENT OF THE COMME						
City: SAMSON State: AL ZIP Code: 36477						
Company Name: Z'S LAND SURVEYING & MAPPING, INC Address: PO BOX 401/1142 PERA ROAD City: SAMSON State: AL ZIP Code: 36477 Signature: Zannie Thomas White Jr Digitally signed by Zannie Thomas White Jr Date: 2024.12.25 06:41:57 -06'00' Date: 12/25/2024 Telephone: (850) 579-2315 Ext.: n/a Email: zanniewhite@yahoo.com						
Telephone: (850) 579-2315 Ext.: n/a Email: zanniewhite@yahoo.com Place Seal Here						
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.						
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): A5. LATITUDE AND LONGITUDE WERE DERIVED F.D.O.T. FRN NETWORK GPS OBSERVATION BUILDING PERMITTED 01/10/2024; PERMITT No.PRSF202400235; B1: BAY COUNTY, B1b:120004; B4:12005C0190; B5: H; B6:06/02/2009; B7:06/02/2009; B9: AE-9.0'; B10:FIRM; B11: NGVD 88, A8(c) EIGHT(8)-FFV-1608 FREEDOM VENTS-250 SQ FT EACH FOR A TOTLA AREA OF 2,000 SF						

Building Street Address (Including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 6503 GOLDEN ASTER TRAIL				FOR INSURA	ANCE COMPANY USE		
			Policy Numbe	Policy Number:			
City: PANAMA CITY BEACH State:		_ ZIP Code: 52	2413	Company NAI	C Number:		
SECTION E – BUILDING MEASUREMENT INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT BFE)							
For Zones AO, AR/AO, and A (without BFE), complete Ite intended to support a Letter of Map Change request, comenter meters.	ms E1–E plete Sec	5. For Items E1- tions A, B, and 0	-E4, use nate C. Check the	ural grade, if availab measurement used	le. If the Certificate is I. In Puerto Rico only,		
Building measurements are based on: Construction *A new Elevation Certificate will be required when constru				uction*	d Construction		
E1. Provide measurements (C.2.a in applicable Building measurement is above or below the natural HAG and			and check t	he appropriate boxe	s to show whether the		
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is: 		[fe	et 🗌 mel	ters 🔲 above or	below the HAG.		
 Top of bottom floor (including basement, crawlspace, or enclosure) is: 			et 🗌 met	ters 🔲 above or	below the LAG.		
E2. For Building Diagrams 6–9 with permanent flood open next higher floor (C2.b in applicable	nings pro	vided in Section	A Items 8 aı	nd/or 9 (see pages 1	I–2 of Instructions), the		
Building Diagram) of the building is:			et 🗌 met	ters 🔲 above or	below the HAG.		
E3. Attached garage (top of slab) is:	 		et 🗌 mel	ters 🔲 above or	below the HAG.		
E4. Top of platform of machinery and/or equipment servicing the building is:			et 🗌 mel	ters 🔲 above or	below the HAG.		
E5. Zone AO only: If no flood depth number is available, floodplain management ordinance?			oor elevated e local officia	in accordance with t il must certify this in	the community's formation in Section G.		
SECTION F - PROPERTY OWNER (OR C	WNER'S	S AUTHORIZE	D REPRES	SENTATIVE) CER	TIFICATION		
The property owner or owner's authorized representative sign here. The statements in Sections A, B, and E are contained as a section of the statements in Sections A, B, and E are contained as a section of the statement of the section of the statement of the section of the sec	who comp	pletes Sections in the best of my known	A, B, and E footblee	or Zone A (without E	BFE) or Zone AO must		
Check here if attachments and describe in the Comm	ents area.	•					
Property Owner or Owner's Authorized Representative No	ame:						
Address:		· · · · · · · · · · · · · · · · · ·					
City:			State: _	ZIP Code	:		
Signature:		Date:					
Telephone: Ext.: Ema	di:						
Comments:							

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE					
6503 GOLDEN ASTER TRAIL	Policy Number:					
City: PANAMA CITY BEACH State: FL ZIP Code: 32413	Company NAIC Number:					
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMMUNITY OFFICIAL COMPLETION)						
The local official who is authorized by law or ordinance to administer the community's floodplain ma Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and sign be						
G1. The information in Section C was taken from other documentation that has been signed engineer, or architect who is authorized by state law to certify elevation information. (Indelevation data in the Comments area below.)						
G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zor E5 is completed for a building located in Zone AO.	ne AO, or Zone AR/AO, or when item					
G2.b. A local official completed Section H for insurance purposes.						
G3. In the Comments area of Section G, the local official describes specific corrections to the	e information in Sections A, B, E and H.					
G4. The following information (Items G5–G11) is provided for community floodplain manager						
G5. Permit Number: PRSF20210023 G6. Date Permit Issued: 12-26-	24					
G7. Date Certificate of Compliance/Occupancy Issued:						
G8. This permit has been issued for: New Construction Substantial Improvement						
G9.a. Elevation of as-built lowest floor (including basement) of the building:	meters Datum:					
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	meters Datum:					
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	meters Datum:					
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	meters Datum:					
G11. Variance issued? Yes No If yes, attach documentation and describe in the Con	nments area.					
The local official who provides information in Section G must sign here. I have completed the information in Section G and certify that it is correct to the best of my knowledge. If applicable, I have also provided specific corrections in the Comments area of this section.						
Local Official's Name: A M Stoner Title: Plans	14/					
NFIP Community Name: Ban Count						
Telephone: Ext.: Email:						
Address:						
City: State: ZIP Code:						
Signature: Date:						
Comments (including type of equipment and location, per C2.e; description of any attachments; and corrections to specific information in Sections A, B, D, E, or H):						
CZE Permitted under 2009 maps BFE was 9.0 OK ofor C.D						
OK ofor C.O						

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE					
6503 GOLDEN ASTER TRAIL	Policy Number:					
City: PANAMA CITY BEACH State: FL ZIP Code: 32413	Company NAIC Number:					
SECTION H – BUILDING'S FIRST FLOOR HEIGHT INFORMATION FOR ALL ZONES (SURVEY NOT REQUIRED) (FOR INSURANCE PURPOSES ONLY)						
The property owner, owner's authorized representative, or local floodplain management official may complete Section H for all flood zones to determine the building's first floor height for insurance purposes. Sections A, B, and I must also be completed. Enter heights to the nearest tenth of a foot (nearest tenth of a meter in Puerto Rico). Reference the Foundation Type Diagrams (at the end of Section H Instructions) and the appropriate Building Diagrams (at the end of Section I Instructions) to complete this section.						
H1. Provide the height of the top of the floor (as indicated in Foundation Type Diagrams) above the	Lowest Adjacent Grade (LAG):					
a) For Building Diagrams 1A, 1B, 3, and 5–9. Top of bottom feet floor (include above-grade floors only for buildings with subgrade crawlspaces or enclosure floors) is:] meters					
b) For Building Diagrams 2A, 2B, 4, and 6–9. Top of next floor (i.e., the floor above basement, crawlspace, or enclosure floor) is:	meters above the LAG					
H2. Is all Machinery and Equipment servicing the building (as listed in Item H2 instructions) elevated H2 arrow (shown in the Foundation Type Diagrams at end of Section H instructions) for the appliance of Yes No						
SECTION I – PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESENT	TATIVE) CERTIFICATION					
The property owner or owner's authorized representative who completes Sections A, B, and H must A, B, and H are correct to the best of my knowledge. Note : If the local floodplain management official indicate in Item G2.b and sign Section G.						
☐ Check here if attachments are provided (including required photos) and describe each attachmen	nt in the Comments area.					
Property Owner or Owner's Authorized Representative Name:						
Address:						
City: State:	ZIP Code:					
Simpeture						
Signature: Date: Telephone: Ext.: Email:	_					
Comments:						

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit	, Suite, and/or Blo	or Bldg. No.) or P.O. Route and Box No.:		FOR INSURANCE COMPANY USE
6503 GOLDEN ASTER TRAIL				Policy Number:
City: PANAMA CITY BEACH	State:_	FL	ZIP Code: <u>32413</u>	Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT VIEW 12/23/2024

Clear Photo One



Photo Two

Photo Two Caption: REAR VIEW AND LEFT SIDE 12/23/2024

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit	, Suite, and/or Blo	FOR INSURANCE COMPANY USE		
6503 GOLDEN ASTER TRAIL	·			Policy Number:
City: PANAMA CITY BEACH	State:	FL	ZIP Code: <u>32413</u>	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: RIGHT SIDE FRONT VIEW 12/23/2024

Clear Photo Three



Photo Four

Photo Four Caption: REAR VIEW WITH AC 12/23/2024

Clear Photo Four



ICC-ES Evaluation Report

ESR-4332

Reissued March 2024

This report also contains:

Revised June 2024

- CBC Supplement

Subject to renewal March 2026

- FBC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00—

OPENINGS

Section: 08 95 43— Vents / Foundation

Flood Vents

REPORT HOLDER: SMART PRODUCT

INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608



1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV–1608 Freedom Flood Vent® is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent® is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent® door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent® FVs must be installed in accordance with Section 4.0 below. See <u>Table 1</u> for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent® is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom

Flood Vent® must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m2) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE:

The Freedom Flood Vent® described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent® unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent® unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.
- 5.4 FFV-1608 Freedom Flood Vent® is manufactured in Gastonia, North Carolina under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2024).

7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-4332) along with the name, registered trademark, or registered logo of the report holder must be included in the product label.
- 7.2 In addition, the Freedom Flood Vent® model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- 7.3 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (800) 507-1527 www.freedomfloodvent.com info@freedomfloodvent.com

TABLE 1-FREEDOM FLOOD VENT®

MODEL NAME	L NAME MODEL NUMBER MODEL SIZE		
Freedom Flood Vent®	FFV-1608	15 ³ / ₄ " X 8 ¹ / ₁₈ "	250

For \$1: 1 inch = 25.4 mm

¹The enclosed coverage area in square feet is equivalent to the performance of the same number of square inches of non-engineered openings.

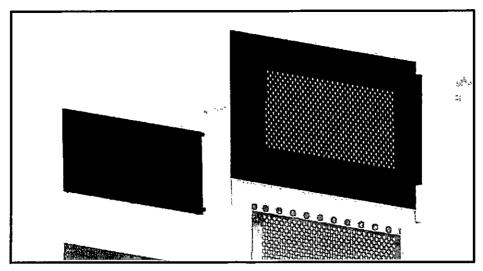


FIGURE 1-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH COVER REMOVED

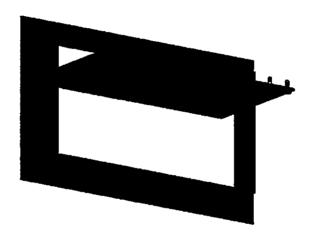


FIGURE 2-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2022 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2022 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2021 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the CRC, provided the design and installation are in accordance with the 2021 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.





ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2023 Florida Building Code—Building
- 2023 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements must be determined in accordance with the Florida Building Code—Building and the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2021 International Building Code® (IBC) meet the requirements of Florida Building Code—Building and the Florida Building Code-Residential, as applicable.

Use of the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code-Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.

